

Product Technical Bulletin

**Everlast
Roofing, Inc.**

Everlast II Economy Steel Roofing and Siding Panel

Description

29-gauge full hard steel. Pretreatment bonds the paint to the substrate resulting in superior adhesion to the primer. Polyurethane primer offers additional corrosion protection. Wider blanks, deeper minor rib heights create a stronger more durable panel.

UL Ratings


- UL construction No# 560 UPLIFT TEST
- UL 2218 Class 4 IMPACT RESISTANCE
- UL 790 Class A FIRE RESISTANCE

Roofing and Siding Applications

- Basic Shade & Shelter
- Interior Liner & Ceiling Panel

Standard Specifications

- 29-gauge (full hard steel) Structural Steel Grade 80 produced in conformance with ASTM792
- 95,000 PSI minimum yield
- Heat-formed panels with 3/4" major rib height; 3/16" minor rib height
- 36" cover width
- Custom cut to the inch up to 40' feet
- Available in a variety of colors
- 3:12 recommended minimum roof pitch
- 10-year non-prorated warranty
- Cut panels coated with CECI™

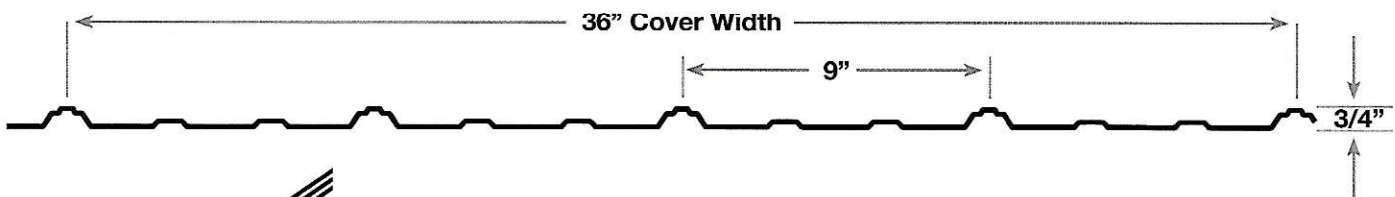

**Everlast
Roofing, Inc.**
OUR NAME SAYS IT ALL

Mid-Atlantic
10 Enterprise Court
Lebanon, PA 17042
Phone: 717.270.6554
888.339.0059

New England
24 JR Mains Drive
Bridgton, ME 04009
Phone: 207.647.5500
800.677.2060

Midwest
7180 N 050 E
Howe, IN 46746
Phone: 260.562.3783
866.562.3782

everlastroofing.com