
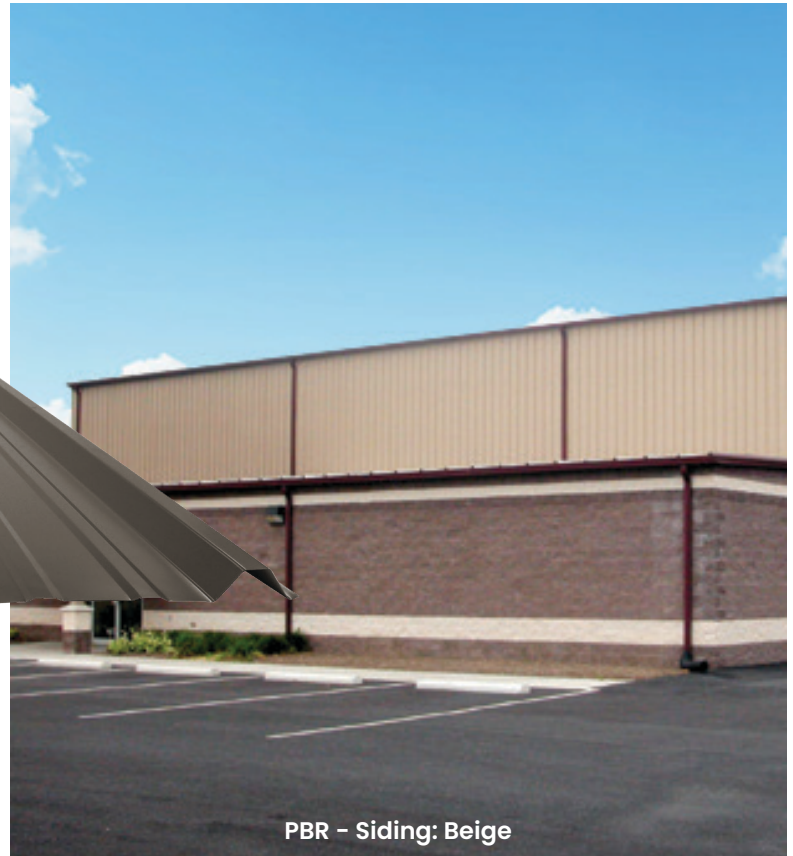


PBR

Standard Specifications

- Structural Steel Grade 80 produced in conformance with ASTM792
- 50,000 PSI minimum yield
- Custom cut to the inch up to 40'
- Available in a variety of colors

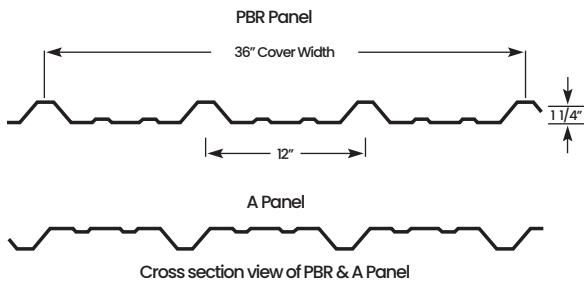

PBR – Siding: Beige

Description

Attractive Design

The PBR Panel is designed for both roofing and siding applications. This panel is excellent for most any exterior use, including industrial, commercial, and agricultural applications. The PBR Panel can also be used as an interior liner panel. The PBR Panel is manufactured in an unpainted Galvalume Plus substrate in both 24 and 26 gauge. A painted 26 gauge galvalume substrate is also available in a variety of colors.

Superior Strength

The PBR Panel provides optimum strength, which is ideal for maximum spanning capabilities, and the weather-tight side lap allows for applications on roof pitches as low as a 1:12.

SERIES	26 GAUGE
SUBSTRATE	Galvalume or Galvanized
FINISH	Synergy™
FILM INTEGRITY	40 Years
FADE/CHALK	30 Years
PERFORMANCE	25 Years Acrylic Coated AZ55

UL Ratings

- UL 2218 Class 4 IMPACT RESISTANCE
- UL 790 Class A FIRE RESISTANCE

Everlast
Roofing, Inc.
OUR NAME SAYS IT ALL

LEBANON, PA
888.339.0059

ORWELL, OH
877.866.9955

HOWE, IN
866.562.3782

BRIDGTON, ME
800.677.2060